
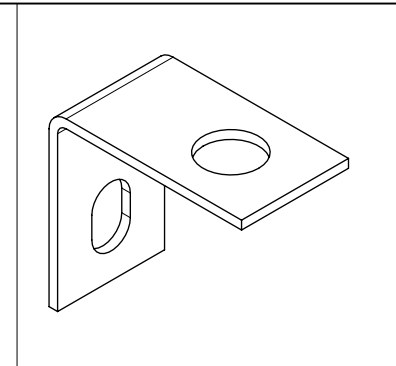
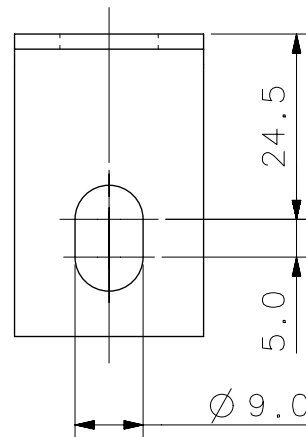
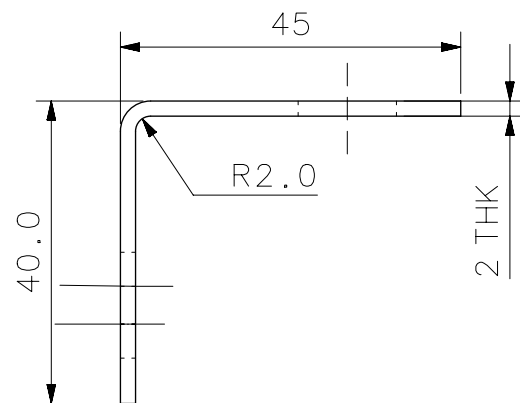


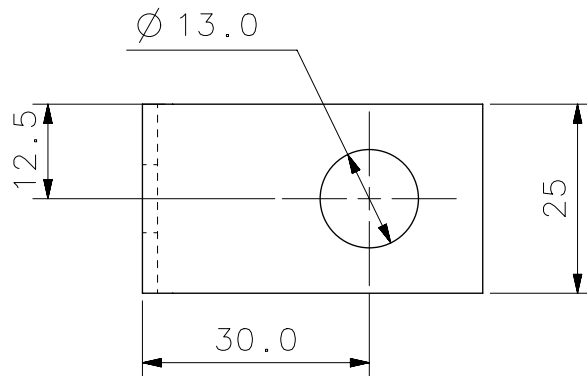

COATING:- PURE POLYESTER POWDER (BLACK)
COATING,REFER PS-622

<SC> :SIGNIFICANT CHARACTERISTICS ▽ :CRITICAL CHARACTERISTICS

BREAK SHARP CORNERS MAY BE EITHER A CHAMFER
OR A RADIUS FROM 0.2 mm MIN. TO 1.0 mm MAX.

UNSPECIFIED TOLERANCES AS PER ISO-2768-1:1989

LINEAR IN mm.	OVER	DIMENSIONS							
	UPTO	0.5	3	6	30	120	400	1000	2000
f FINE (X.XXX)		± 0.05	± 0.05	± 0.1	± 0.15	± 0.2	± 0.3	± 0.5	-
m MEDIUM (X.XX)		± 0.1	± 0.1	± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2
c COARSE (X.X)		± 0.2	± 0.3	± 0.5	± 0.8	± 1.2	± 2	± 3	± 4
v VERY COARSE (X)		-	± 0.5	± 1	± 1.5	± 2.5	± 4	± 6	± 8

ANGULAR IN deg.	OVER	LENGTH OF SHORTER SIDE OF THE ANGLE IN mm.				
	UPTO	10	50	120	400	-
f FINE (X.XXX)		± 1°	± 0° 30'	± 0° 20'	± 0° 10'	± 0° 5'
m MEDIUM (X.XX)		± 1°	± 1°	± 0° 30'	± 0° 15'	± 0° 10'
c COARSE (X.X)		± 1° 30'	± 1°	± 0° 30'	± 0° 15'	± 0° 10'
v VERY COARSE (X)		± 3°	± 2°	± 1°	± 0° 30'	± 0° 20'

PART OF THIS DRAWING / DOCUMENT SHOULD NOT BE
REPRODUCED IN ANY FORM OR BY ANY MEANS WITHOUT
WRITTEN PERMISSION OF M & M LTD.

COMPUTER GENERATED DRAWING DO NOT CHANGE MANUALLY

IF IN DOUBT, ASK DO NOT SCALE DRG SIZE : A4

MAHINDRA & MAHINDRA LIMITED
TRACTOR DIVISION
KANDIVLI (EAST), MUMBAI 400 101, INDIA.

E.R. / PROC.REQ.NO :
18083

PART NO. :
007600466D1

PART NAME :
BRACKET PROP SHAFT
COVER TO PILLOW BLOCK

MATERIAL :
HRLC, GR D,
IS1079

HEAT TREATMENT :

	NAME	SIGN	DATE	FIRST USED TRCR. MODEL
CAD ENGG.	ASP	-sd-	30/04/02	
DESIGNER	KR	-sd-	30/04/02	SCALE 1 : 1
CHECKER	ASP	-sd-	30/04/02	SHEET 1 OF 1
APPR.BY	DSS	-sd-	30/04/02	UNIT QTY. : 2
				WEIGHT : 0.028 kg.

ALL DIMENSIONS ARE IN mm. CHECK DRG WITH LATEST CHANGE No

600000010047 AB REDRAWN WITH 3D REF. PG NVC RAW 04/06/15

E.R.NO. LET LOC REVISIONS DSNR CKR. APPR. DATE